


SAFEONE DNSR-2R Time Delay Relay

Hardware

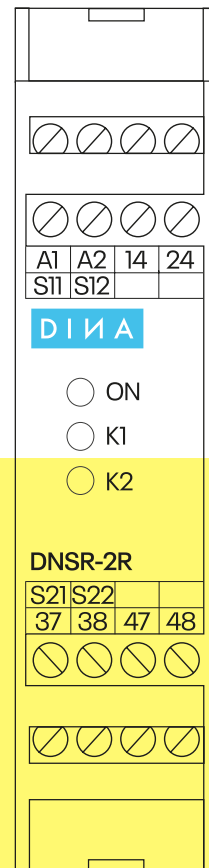

Safety switching device for enabling and time delayed enabling of control circuits

DINA Elektronik GmbH

Esslinger Straße 84
72649 Wolfschlugen
Germany

Phone +49 7022 9517 0

Fax +49 7022 9517 700

Mail info@dina.de

Web www.dina.de

© Copyright by DINA Elektronik GmbH 2021

All parts of this documentation are protected by copyright.

Any use beyond that permitted under copyright law is not permitted without express written consent from the publisher. This applies in particular to the reproduction, distribution and translation of this documentation or parts thereof, as well as the storage and processing of this content using electronic data processing systems.

The information contained in this documentation corresponds to the technical state of the product at the time these operating instructions were published.

This documentation applies to:

Designation	ID no.
DNSR-2R	33SR10
DNSR-2R	33SR11
DNSR-2R	33SR12
DNSR-2R	33SR13
DNSR-2R	33SR14

Legal information

Handbook:	Hardware
Target group:	Electricians, electrical designers
Editor:	DINA Elektronik GmbH
File name:	BA_DNSR-2R_zeitrelais-d-V01
Language:	EN
Publication as at:	July 9, 2021

Table of Contents

1	Structure of the document	5
1.1	Conventions	5
1.1.1	Emphasizing information	5
1.1.2	Emphasizing paragraphs using typography	5
2	Safety	7
2.1	Warnings	7
2.1.1	Function of warnings	7
2.1.2	Design of warnings	7
2.1.3	Hazard symbols	8
2.2	Qualification of personnel	8
2.2.1	Electrician	8
2.2.2	Electrical designers	8
2.3	Intended use and improper use	9
2.3.1	Certification data	9
2.4	Documentation	10
2.5	Safety regulations	10
2.5.1	Retrofitting and conversion	11
2.5.2	Basic safety regulations	11
2.6	Working on live parts	12
3	EC declaration of conformity	
4	Product description	14
4.1	Pin assignment	14
4.2	Functional specification for 33SR10 to 33SR14	14
4.2.1	33SR10 und 33SR12	15
4.2.2	33SR11	15
4.2.3	33SR13	16
4.2.4	33SR14	16
5	Diagnostics and switching status displays	17
5.1	LED indicators	17
6	Order information	

7	Technical data	18
7.1	Supply	18
7.2	Digital inputs	18
7.3	Voltage outputs	18
7.4	Contact outputs	19
7.5	General data	19
7.6	Connection data	20
7.7	Environmental conditions	20
7.8	Dimensions	20
7.9	Safety technical data	20
7.10	Safety-related parameters in accordance with DIN EN ISO 13849-1:2016-06	21
7.11	Contact life	21
8	Installation and removal	22
8.1	Installing a module	22
8.1.1	Overview	22
8.2	Removing a module	22

1 Structure of the document

1.1 Conventions

Information of particular importance is emphasized in this documentation through the use of symbols, typography or formulations.

1.1.1 Emphasizing information

The following symbols indicate important information:



Degree of hazard (e. g. **WARNING**):
Triangular symbols indicate the degree of hazard in warnings.



Type of hazard (e.g. **electrical shock – dangerous voltage**):
Triangular symbols indicate the type of hazard in warnings.



Information: Additional clarification



Tip: Additional information to help optimize the workflow.

1.1.2 Emphasizing paragraphs using typography

The following typography is used to emphasize paragraphs with special functions:



Indicates an instruction.



Indicates an expected reaction.



Indicates an unexpected reaction.



Indicates an item in a list.

1.1.3 Emphasizing words using typography

The following typography is used to emphasize words with special functions:



Represents a numbered item in a figure.



Indicates a cross-reference to another page, figure or document.

1.2 We value your opinion!

We do all we can to provide complete, accurate documentation for the product. If you have any suggestions for improvement or advice for us, please share your thoughts with us. Send us your comments by e-mail to the following address.

E-Mail: info@dina.de

2 Safety

2.1 Warnings

2.1.1 Function of warnings

Warnings warn users about hazards when handling the product. The hazards are classified, specified, described and supplemented with information about how to avoid them.

- If there is a warning before a list of instructions, the hazard is present throughout the entire activity.
- If there is a warning immediately before an instruction, the hazard is present during the next step.

2.1.2 Design of warnings

All warnings are indicated by a signal word and a warning symbol. The different combinations of the signal word and warning symbol indicate the degree of danger.

**DANGER**

For an immediate hazard that will result in severe injuries or death.

**WARNING**

For an immediate hazard that could result in severe injuries or death.

**CAUTION**

For a potentially hazardous situation that could result in injuries.

**CAUTION**

For a potentially harmful situation in which the product or an item near it could be damaged.

**CAUTION**

For a hazard that could cause environmental damage.

2.1.3 Hazard symbols



Note

The warning symbol may be present alongside another hazard symbol that represents the type of hazard, in order to attract the reader's attention.

Hazard symbols are indicated by a triangular symbol in the context of warnings. The following hazard symbols are used in this documentation:



Electric shock – dangerous voltage!

2.2 Qualification of personnel

DINA Elektronik GmbH distinguishes between specialist staff with different qualifications when it comes to carrying out work on the product. The minimum required qualifications are specified for each task and are defined as follows:

2.2.1 Electrician

Specialist who installs, maintains and repairs the electrical system in the product. A specialist is a person whose specialist training means that they have the knowledge and experience, including knowledge of relevant regulations, necessary to assess the work assigned to them and the potential hazards.



Note

When evaluating a person's specialist training, multiple years of work in the relevant field may also be taken into account.

→ **DIN VDE 1000-10** Requirements for persons working in a field of electrical engineering

2.2.2 Electrical designers

Specialists who design the electrical system and the product. A specialist is a person whose specialist training means that they have the knowledge and experience, including knowledge of relevant regulations, necessary to assess the work assigned to them and the potential hazards.



Note

When evaluating a person's specialist training, multiple years of work in the relevant field may also be taken into account.

→ **DIN VDE 1000-10** Requirements for persons working in a field of electrical engineering

2.3 Intended use and improper use

The product has exclusively been developed for use for the purpose described here. The specifications set out in these operating instructions must be strictly complied with.

- The DNSR-2R is a switching device for enabling and time delayed enabling of control circuits.
- The safety module is intended for use on machines and plants to prevent hazards from arising.

Any other form of use is regarded as improper use.

If the product is

- not used as intended,
- improperly maintained or
- incorrectly operated,

the manufacturer will not assume any liability for any damage that results. In this case, the risk shall be borne exclusively by the user.

2.3.1 Certification data

The product is certified as safety equipment in accordance with:

<ul style="list-style-type: none"> • DIN EN ISO 13849-1:2016-06, Category 3, PLd 	
<ul style="list-style-type: none"> • DGUV Test: GS-ET-20:2016-10 • EC type examination certificate 	Notified body: DGUV Test Prüf- and Zertifizierungsstelle Elektrotechnik, Fachbereich: ETEM Gustav-Heinemann-Ufer 130 50968 Cologne, Germany (Reg. no.: 0340)
<ul style="list-style-type: none"> • EMC Directive 	Certified by: ELMAC GmbH Bondorf
<ul style="list-style-type: none"> • CNL, USL 	File E227037
<ul style="list-style-type: none"> • QM system certified as per DIN EN ISO 9001:2015 	Certified by: DQS GmbH 60433 Frankfurt am Main, Germany



NOTE

You can download the certificates from our website:

→ <https://www.dina.de/downloads>

2.4 Documentation

Operating instructions contain instructions on how to use a product safely, correctly and cost-effectively. Follow the instructions in these operating instructions in order to prevent hazards, avoid repair costs and standstill, and improve the reliability and service life of the product. You must read the operating instructions and ensure that you understand them.



- ▶ Before working with the product, read the operating instructions that come with the product.
- ▶ Always ensure that the operating instructions are available where the product is in use.

2.5 Safety regulations

The safety regulations listed below must always be complied with. In the event that these safety regulations are not complied with or the device is used improperly, **DINA Elektronik GmbH** accepts no liability for any resulting injury or damage.

- **The product must only be installed and commissioned by a skilled electrician or a trained, instructed person, who is familiar with these operating instructions and the applicable specifications regarding occupational health and safety and accident prevention.**

WARNING



Danger to persons and materials! In the event that specifications are not complied with, this can result in death, severe injuries or significant material damage.

- ▶ Observe VDE, EN and local regulations, in particular with regard to protective measures.
- **If the emergency stop is used, either the integrated restart prevention function must be used or the machine must be prevented from restarting automatically using a superordinate control system.**
- **When installing the device, the required distances as per DIN EN 50274, VDE 0660514 must be taken into account.**
- ▶ During transport, storage and operation, comply with the conditions set out in EN 60068-2-1, 2-2.
- ▶ Assemble the device in a control cabinet with at least IP54 degree of protection. Otherwise, dust and moisture can impair the functions. The device must be installed in a control cabinet.
- ▶ Ensure that the output contacts have sufficient protective circuitry for capacitive and inductive loads.
- ▶ Follow the specifications in the general technical data.

**Note**

More detailed information can be found in the **R Technical data** section.

**WARNING**

Electric shock – dangerous voltage! During operation, switching devices conduct dangerous voltages.



Never remove protective covers from electrical switching devices during operation.

► Replace the device the first time a fault occurs.



Dispose of the device in accordance with nationally applicable environmental regulations.

2.5.1 Retrofitting and conversion

- Unauthorized conversion voids any warranty. This can cause hazards that can lead to severe or even fatal injury.

2.5.2 Basic safety regulations

The safety regulations listed below must always be complied with. In the event that these safety regulations are not complied with or the device is used improperly, **DINA Elektronik GmbH** accepts no liability for any resulting injury or damage.

- The product described here has been developed to perform safety-related functions as part of an entire system.
- The entire system is made up of sensors, analysis units, reporting units and safe switch-off concepts.
- It is the manufacturer's responsibility to ensure that a system or machine is functioning correctly as a whole.
- The manufacturer of the system is obligated to check and document the efficacy of the implemented safety concept within the entire system. This documentation must be produced again every time the safety concept or safety parameters are modified.
- The manufacturer's specifications for the system or machine with regard to maintenance intervals must be complied with.

- **DINA Elektronik GmbH** is not able to make any guarantees regarding the properties of an overall system not designed by the company.
- **DINA Elektronik GmbH** accepts no liability for any recommendations given or implied in the following description.
- No new guarantee, warranty or liability claims that go beyond **DINA Elektronik GmbH's** general delivery conditions can be derived from the following description.
- To prevent EMC disturbances, the physical environmental and operating conditions where the product is installed must correspond to the EMC section of DIN EN 60204-1.
- If contact outputs are used, the safety function must be requested at least once per month for Performance Level (e) and once per year for Performance Level (d).

2.6 Working on live parts

WARNING

Electric shock – dangerous voltage! Touching live components can cause severe or even fatal injury, depending on circumstances, as a result of an electric shock.




- ▶ Never assume that a circuit is dead.



- ▶ Always check circuits as a safety precaution! Components being worked on may only be live if this is absolutely necessary and stipulated.
- ▶ Accident prevention regulations (e.g. VBG4 and VDE 105) must be observed during all work.
- ▶ Only use suitable, intact tools and measuring equipment.

3 EC declaration of conformity



Original EG-Konformitätserklärung

(gemäß der Richtlinie 2006/42/EG, Anhang II, IA)

Original EC-Declaration of Conformity

(according to Directive 2006/42 / EC, Annex II, IA)

DINA Elektronik GmbH
 Esslinger Str. 84
 72649 Wolfschlugen
 Deutschland


Wir erklären, dass folgendes Produkt allen einschlägigen Bestimmungen der Richtlinie 2006/42/EG entspricht.
 We declare, that the following product fulfils all the relevant provisions of Directive 2006/42 / EC.

Produkt/Product	Funktion/Function
DNSR-2R Sicherheitsschaltgerät/safety switching device ID-No. 33SR10, 33SR11, 33SR12, 33SR13, 33SR14	Zeitrelais/time relay

Weitere EU-Richtlinien/Further EC- directives
2014/30/EU EMV-Richtlinie/EMC-Directive 2011/65/EU RoHS Richtlinie/RoHS-Directive

Benannte Stelle/Notified Body	EG Baumusterprüfbescheinigung/EC Type-Examination certificate
DGUV Test Prüf- und Zertifizierungsstelle, Elektrotechnik, Fachbereich: Energie, Textil, Elektro, Medienerzeugnisse Gustav-Heinemann-Ufer 130 D-50968 Köln Kenn-Nr.: Q340	Reg.-Nr./No.: ET 21047

Bevollmächtigter für die Zusammenstellung der technischen Unterlagen/ Authorized representative for the compilation of the technical documents
DINA Elektronik GmbH Esslinger Str. 84 72649 Wolfschlugen Deutschland



Stefan Najib
Geschäftsführer/CEO

Wolfschlugen, 01.10.2021

4 Product description

The **DNSR-2R** is a switching device for enabling and time delayed enabling of control circuits.

The switching device has two separate starting circuits.

Secure digital inputs and contact outputs are available for this.

The operational readiness and switching status of the contact outputs are displayed using LEDs. The time delay relays are available in different versions with different time delays.



NOTE

Potential overvoltages and overcurrents are monitored.

4.1 Pin assignment

A1	A2	14	24
S11	S12		
D I N A			
<input type="radio"/> ON <input type="radio"/> K1 <input type="radio"/> K2			
DNSR-2R			
S21	S22		
37	38	47	48

A1	Operating voltage +24 V DC
A2	Operating voltage 0 V
S11	Output control voltage 15 V
S21	Output control voltage 12 V
S12	Input starting circuit 1
S22	Input starting circuit 2
14	Diagnostic contact (1 NO contact)
24	Diagnostic contact (1 NO contact)
37/38	Enabling contact (1 NO contact)
47/48	Enabling contact (1 NO contact)
LED ON	PWR on/off
LED K1	Relay 37/38 status display
LED K2	Relay 47/48 status display

4.2 Functional specification for 33SR10 to 33SR14

The time delay relay has two separate starting circuits.

- The inputs are controlled via the internal 15 V voltage at S11 and 12 V voltage at S21.
- The start buttons must be connected between S11 and S12 (starting circuit 1) and between S21 and S22 (starting circuit 2).
- Diagnostic contacts 14 and 24 close when the device is ready for operation and open if there is a fault.

4.2.1 33SR10 und 33SR12

<p>▶ Close starting circuit 1 (S11-S12)</p> <p>◀ Enabling contact 37/38 closes without delay.</p>										
<p>▶ Open starting circuit 1 (S11-S12)</p> <p>◀ Enabling contact 37/38 opens with a delay.</p>										
<p>▶ Close starting circuit 2 (S21-S22)</p> <p>◀ Enabling contact 47/48 closes with a delay.</p>	<p>Delay times</p> <table border="1"> <thead> <tr> <th></th> <th>33SR10</th> <th>33SR12</th> </tr> </thead> <tbody> <tr> <td>37/38</td> <td>1.5 s off delay</td> <td>1.5 s off delay</td> </tr> <tr> <td>47/48</td> <td>1.5 s on delay</td> <td>50 s on delay</td> </tr> </tbody> </table>		33SR10	33SR12	37/38	1.5 s off delay	1.5 s off delay	47/48	1.5 s on delay	50 s on delay
		33SR10	33SR12							
37/38	1.5 s off delay	1.5 s off delay								
47/48	1.5 s on delay	50 s on delay								
<p>▶ Open starting circuit 2 (S21-S22)</p> <p>◀ Enabling contact 47/48 opens without delay.</p>										

4.2.2 33SR11

<p>▶ Close starting circuit 1 (S11-S12)</p> <p>◀ Enabling contact 37/38 closes without delay.</p>							
<p>▶ Open starting circuit 1 (S11-S12)</p> <p>◀ Enabling contact 37/38 opens with a delay.</p>							
<p>▶ Close starting circuit 2 (S21-S22)</p> <p>◀ Enabling contact 47/48 closes without delay.</p>	<p>Delay times</p> <table border="1"> <thead> <tr> <th></th> <th>33SR11</th> </tr> </thead> <tbody> <tr> <td>37/38</td> <td>15 s off delay</td> </tr> <tr> <td>47/48</td> <td>15 s off delay</td> </tr> </tbody> </table>		33SR11	37/38	15 s off delay	47/48	15 s off delay
		33SR11					
37/38	15 s off delay						
47/48	15 s off delay						
<p>▶ Open starting circuit 2 (S21-S22)</p> <p>◀ Enabling contact 47/48 opens with a delay.</p>							

4.2.3 33SR13

<p>▶ Close starting circuit 1 (S11-S12) ◀ Enabling contact 37/38 closes with a delay.</p>							
<p>▶ Open starting circuit 1 (S11-S12) ◀ Enabling contact 37/38 opens without delay.</p>							
<p>▶ Close starting circuit 2 (S21-S22) ◀ Enabling contact 47/48 closes with a delay.</p>	<p>Delay times</p> <table border="1"> <thead> <tr> <th></th> <th>33SR13</th> </tr> </thead> <tbody> <tr> <td>37/38</td> <td>1.5 s on delay</td> </tr> <tr> <td>47/48</td> <td>180 s on delay</td> </tr> </tbody> </table>		33SR13	37/38	1.5 s on delay	47/48	180 s on delay
		33SR13					
37/38	1.5 s on delay						
47/48	180 s on delay						
<p>▶ Open starting circuit 2 (S21-S22) ◀ Enabling contact 47/48 opens without delay.</p>							

4.2.4 33SR14

<p>▶ Close starting circuit 1 (S11-S12) ◀ Enabling contact 37/38 closes without delay.</p>							
<p>▶ Open starting circuit 1 (S11-S12) ◀ Enabling contact 37/38 opens with a delay.</p>							
<p>▶ Close starting circuit 2 (S21-S22) ◀ Enabling contact 47/48 closes without delay.</p>	<p>Delay times</p> <table border="1"> <thead> <tr> <th></th> <th>33SR14</th> </tr> </thead> <tbody> <tr> <td>37/38</td> <td>30 s off delay</td> </tr> <tr> <td>47/48</td> <td>600 s off delay</td> </tr> </tbody> </table>		33SR14	37/38	30 s off delay	47/48	600 s off delay
		33SR14					
37/38	30 s off delay						
47/48	600 s off delay						
<p>▶ Open starting circuit 2 (S21-S22) ◀ Enabling contact 47/48 opens with a delay.</p>							

→ Inputs




← Outputs









5 Diagnostics and switching status displays

The module has an LED display indicating

- Operational readiness
- Enabling contact status

5.1 LED indicators

Key	
	LED on
	LED off
	LED flashing – Contact our support team at support@dina.de

SAFEONE DNSR-2R	State
LED	
ON	 PWR off
	 PWR on
K1	 Enabling circuit 37/38 open
	 Enabling circuit 37/38 closed
	 faults
K2	 Enabling circuit 47/48 open
	 Enabling circuit 47/48 closed
	 faults

6 Order information

Description	Product	ID no.
DNSR-2R Time Delay Relay	SAFEONE DNSR-2R	33SR10
		33SR11
		33SR12
		33SR13
		33SR14

7 Technical data

7.1 Supply

Operating voltage U_B	24V DC ($\pm 10\%$)
Current consumption at 24 V	40 mA in rest position 70 mA in working position
Power consumption on A1/A2	1.6 W


7.2 Digital inputs

Inputs	S12	S22
Input voltage range	15V DC $\pm 0.5V$	12V DC $\pm 0.5V$

7.3 Voltage outputs

Outputs	S11	S21
Voltage	15V DC $\pm 0.5V$	12V DC $\pm 0.5V$

7.4 Contact outputs

Outputs	37/38, 47/48	14,24
Contact material	AgNi	
Output guidance		
Minimum switching current see Contact service life section	10 mA	3 mA
Maximum switching current * construction-related limitation	6 A* 1 A	0.5 A
Switching capacity in accordance with IEC 60947-5-1	DC13: 2 A/24 V DC13 at 0.1 Hz: 4 A/24 V AC15: 3 A/250 V	
Mechanical service life	≥ 10 ⁷ switching cycles	≥ 5 x 10 ⁷ switching cycles
Contact fuse	5A gL/gG	
Typical response/release time	10ms/6 ms	

7.5 General data

Type of protection (housing and terminals)	IP 20	
Type of protection (place of installation)	Min. IP 54	
Clearance and creepage distances between circuits	in accordance with DIN EN 50178	
Rated insulation voltage	37/38, 47/48 250V AC	14,24 30V AC
Rated surge voltage/insulation	4 kV	
Degree of contamination	2	
Overvoltage category	III	
Housing material	Polyamide (PA), not reinforced	

7.6 Connection data

Terminals	Screw terminals
Conductor cross section	0.25 – 1.5mm ²
AWG conductor cross section	AWG 24–16
Conductor type	Flexible with end sleeves
Stripping length	8 mm
Min/max tightening torque	0.5Nm/0.6Nm

7.7 Environmental conditions

Operating temperature	-10 °C to +60 °C
Storage temperature	-40 °C to +85 °C
Altitude of place of use	< 2000 m above sea level
Shock resistance	15 g, all 3 axes

7.8 Dimensions

W x H x D	22.5 x 114 x 99 mm (0.886 x 4.488 x 3.897 in)
Size of DIN rail	35.0 mm (1.378 in)
Weight	130 g

7.9 Safety technical data


Stop category in accordance with IEC 60204	1
--	---

7.10 Safety-related parameters in accordance with DIN EN ISO 13849-1:2016-06

Category	1
Performance Level	c
MTTFd [a]	98
PFHd	4.3E-08
Service life	240 months

7.11 Contact life

Electrical service life of the output contacts in accordance with DIN EN 60947-5-1/Annex C.3

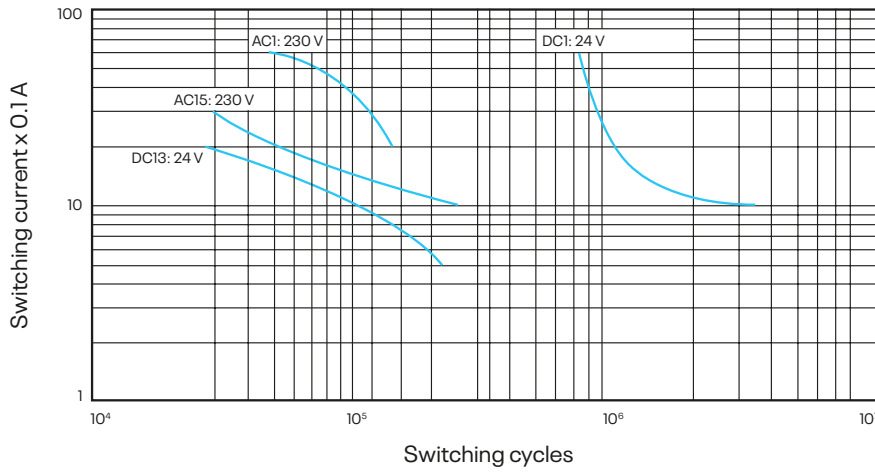

8 Installation and removal


8.1 Installing a module

8.1.1 Overview

- Ⓐ 70–75 mm (2.756–2.953 in)
- ① Top hat rail
- ② Locking slider
- ③ Cable duct

Procedure

- ▶ Hook the module onto the top hat rail and press it downward.
- ◀ The locking slider ① engages under the top hat rail.

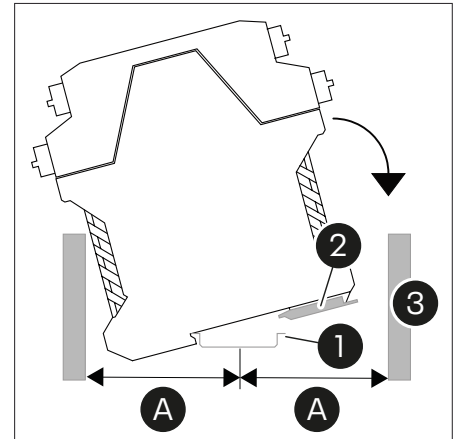

8.2 Removing a module

Procedure

- ▶ Use a screwdriver ① to move the locking slider away from the module.
- ▶ Move the module upward and remove it from the rail.

